



SELECTION INFORMATION

Grating Description	MultiDrain Intercept Profile Stainless Steel	Load Class	B 125
Pavement Finish	Small block paving	Lengths Available	1m and 0.5m

SPECIFICATION

Intercept Profile stainless steel grating fitted with ACO Drainlock bar-less locking system. Designed for pedestrian and light duty vehicular traffic. Typical applications include pedestrian zones, landscaped areas, around building facades and entranceways, private car parking. Load Class B 125.

Options: Grating style is also available in galvanised steel.

Channel system: [ACO MultiDrain M100DS with stainless steel protective edge rails](#)

Note: The information below is for the grating only. Channels sold separately.


PRODUCT DATA

Order Number (1m / 0.5m)	132556 / 132551	Weight (kg)	3.7 / 1.9
Material	Grade 304 Stainless Steel	Slot width (mm)	8
Length (m)	1 / 0.5	Intake area (mm ² /m)	44500
Width (mm)	123	Finish	Pickle Passivated







1 2 3 4 5 6

PART NUMBER TABLE		
DESCRIPTION	1m	0.5m
INTERCEPT PROFILE GALVANISED STEEL	132555	132550
INTERCEPT PROFILE STAINLESS STEEL	132556	132551


A GRATING WATER INTAKE AREA 44,500mm²/m

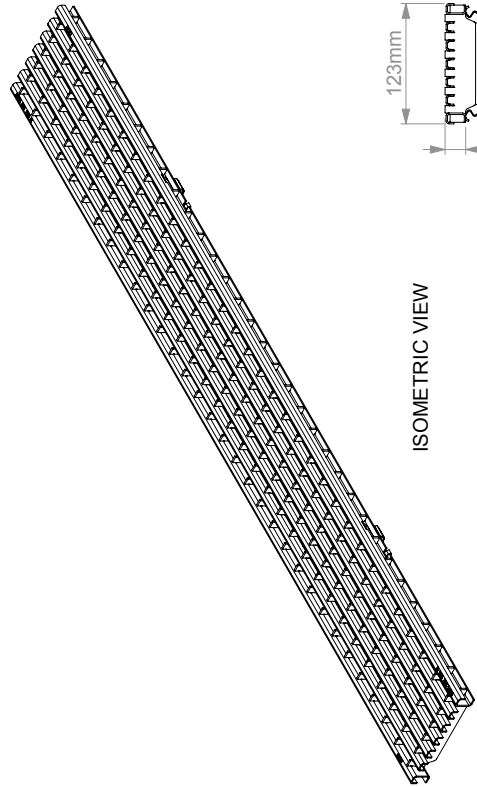

ISOMETRIC VIEW

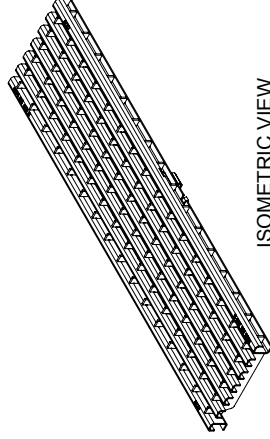

ISOMETRIC VIEW



Version	Date	Description	Name
		Drawing Number: E1-M01-085-1	Revision: A
		Title:	Part Number: SEE TABLE
			M100D INTERCEPT PROFILE
			STEEL GRATING B125
Created by: DEN	Released by: JEC	Projection: ISO-A	Units: mm
Created at: 15.4.2015	Released at: 29.4.2015		Format: A3
Replacement for:	Replaced by:		Scale: 1:5
			Sheet: 1 of 1

NOTES:
 DIMENSIONS ARE FOR INDICATION ONLY AND MAY VARY DUE TO PART MANUFACTURING TOLERANCES AND INSTALLATION DETAILS

A B C D E F