



SELECTION INFORMATION

Grating Description	MultiDrain Intercept Profile Stainless Steel	Load Class	B 125
Pavement Finish	Small block paving	Lengths Available	1m and 0.5m

SPECIFICATION

Intercept Profile stainless steel grating fitted with ACO Drainlock bar-less locking system. Designed for pedestrian and light duty vehicular traffic. Typical applications include pedestrian zones, landscaped areas, around building facades and entranceways, private car parking. Load Class B 125.

Options: Grating style is also available in galvanised steel.

Channel system: [ACO MultiDrain M100DS, M150DS, M200DS with stainless steel protective edge rails](#)

Note: The information below is for the grating only. Channels sold separately.


PRODUCT DATA

Order Number (1m / 0.5m)	132556 / 132551	Weight (kg)	3.7 / 1.9
Material	Grade 304 Stainless Steel	Slot width (mm)	8
Length (m)	1 / 0.5	Intake area (mm ² /m)	44500
Width (mm)	123	Finish	Pickle Passivated

1 2 3 4 5 6


PART NUMBER TABLE		
DESCRIPTION	1m	0.5m
INTERCEPT PROFILE GALVANISED STEEL	132555	132550
INTERCEPT PROFILE STAINLESS STEEL	132556	132551

A GRATING WATER INTAKE AREA 44,500mm²/m

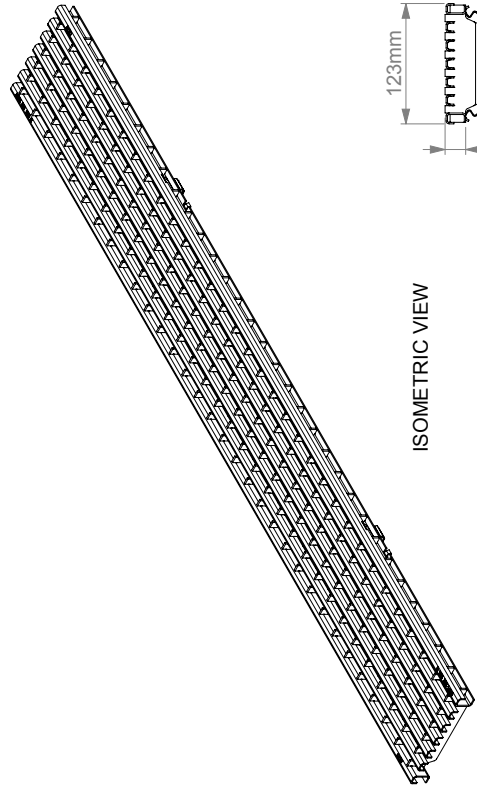


ISOMETRIC VIEW


8mm
29mm

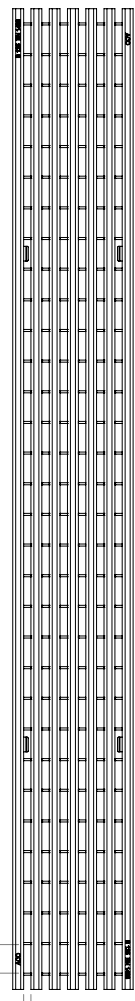



1000mm



8mm
29mm

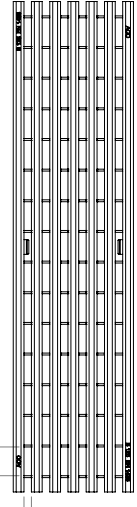

500mm

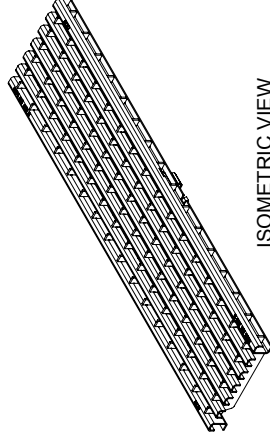

ISOMETRIC VIEW

Version	Date	Description	Name
		Drawing Number: E1-M01-085-1	Revision: A
		Title:	Part Number: SEE TABLE
			Format: A3
		Projection: ISO-A	Scale: 1:5
		Released by: JEC	Sheet: 1 of 1
		Released at: 29.4.2015	
		Replaced by:	
		Created by: DEN	
		Created at: 15.4.2015	
		Replacement for:	
		Units: mm	
		Protection note: DIN ISO 16016	
		Information contained in this drawing is copyright property of ACO Technologies plc. Any reproduction in part or whole without written permission of ACO Technologies plc is prohibited.	

NOTES:
DIMENSIONS ARE FOR INDICATION ONLY AND MAY VARY DUE TO PART MANUFACTURING TOLERANCES AND INSTALLATION DETAILS

A B C D E F