


# ACO Water Management:

## House & Garden

### ACO HexDrain® B 125

- ▶ Ideal for light duty applications
- ▶ Easy and quick to install
- ▶ Heelguard™ grating, suitable for pedestrian traffic
- ▶ Full range of accessories for professional installation
- ▶ CE marked and fully certified to Load Class B 125  
BS EN 1433:2002

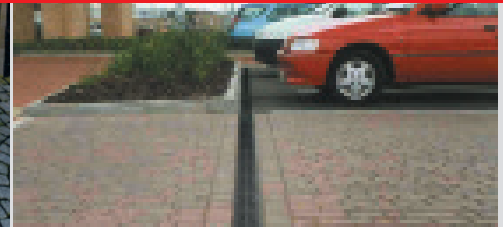

### ACO HexDrain® B 125

#### The ideal drainage channel for light duty applications

Manufactured from polypropylene, ACO HexDrain® B 125 is suitable for vehicle traffic up to Load Class B 125.

ACO HexDrain® B 125 comes complete with a corrosion resistant black composite Heelguard™ grating, ideal for pedestrian traffic.

The ACO Drainlock™ grating has a bar-less locking device, allowing for quick and simple installation of gratings.

A full range of accessories are available, designed to aid simple and fast installation.

#### Applications

- ▶ Driveways
- ▶ Small private car parks


# ACO HexDrain® B 125

## System Overview



Driveways and small private car parks

## Features

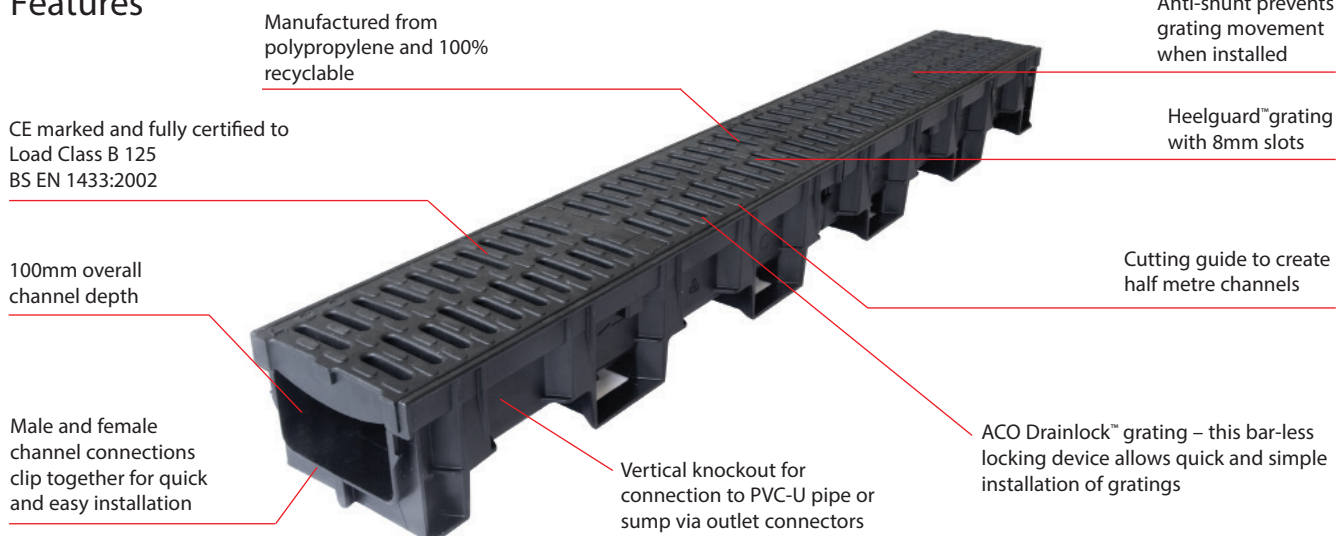

### ACO HEXDRAIN® B 125 ACCESSORIES



### ACO HexDrain® B 125 channel assembly

Product code	Description	Length (mm)	Width (mm)	Depth (mm)	Invert (mm)	Weight (kg)
11019	Channel with 2 composite Heelguard™ gratings	1000	138	100	75	2.9

### ACO HexDrain® B 125 accessories

Product code	Description	Length (mm)	Width (mm)	Depth (mm)	Invert (mm)	Weight (kg)
11085	Closing end cap	11	138	105	-	0.10
11285	Ø110mm Vertical outlet connector	-	Ø110	60	-	0.10
11191	Ø110mm Roddable foul air-trap	240	Ø110	400	-	1.20
11385	Black plastic sump assembly c/w silt bucket*	-	Ø160	510	-	3.00

\* Sump assembly consists of a Ø160mm vertical outlet connector, silt bucket and sump body.

### ACO HEXDRAIN® B 125 INSTALLATION

