



SELECTION INFORMATION

Grating Description	MultiDrain Flag Ductile Iron	Load Class	D 400
Pavement Finish	Small block paving	Lengths Available	0.5m

SPECIFICATION


Flag slotted ductile iron grating fitted with ACO Drainlock bar-less locking system. Designed for both pedestrian and medium duty vehicular traffic. Typical applications include pedestrian zones, landscaped areas and car parking. Load Class D 400.

Channel system: [ACO MultiDrain M100D with galvanised steel protective edge rails](#)
[ACO MultiDrain M100PPD with galvanised steel protective edge rails](#)

Note: The information below is for the grating only. Channels sold separately.

PRODUCT DATA

Order Number	132042	Weight (kg)	4.9
Material	Ductile Iron	Slot width (mm)	8
Length (m)	0.5	Intake area (mm ² /m)	30400
Width (mm)	123	Finish	Matt Black Painted

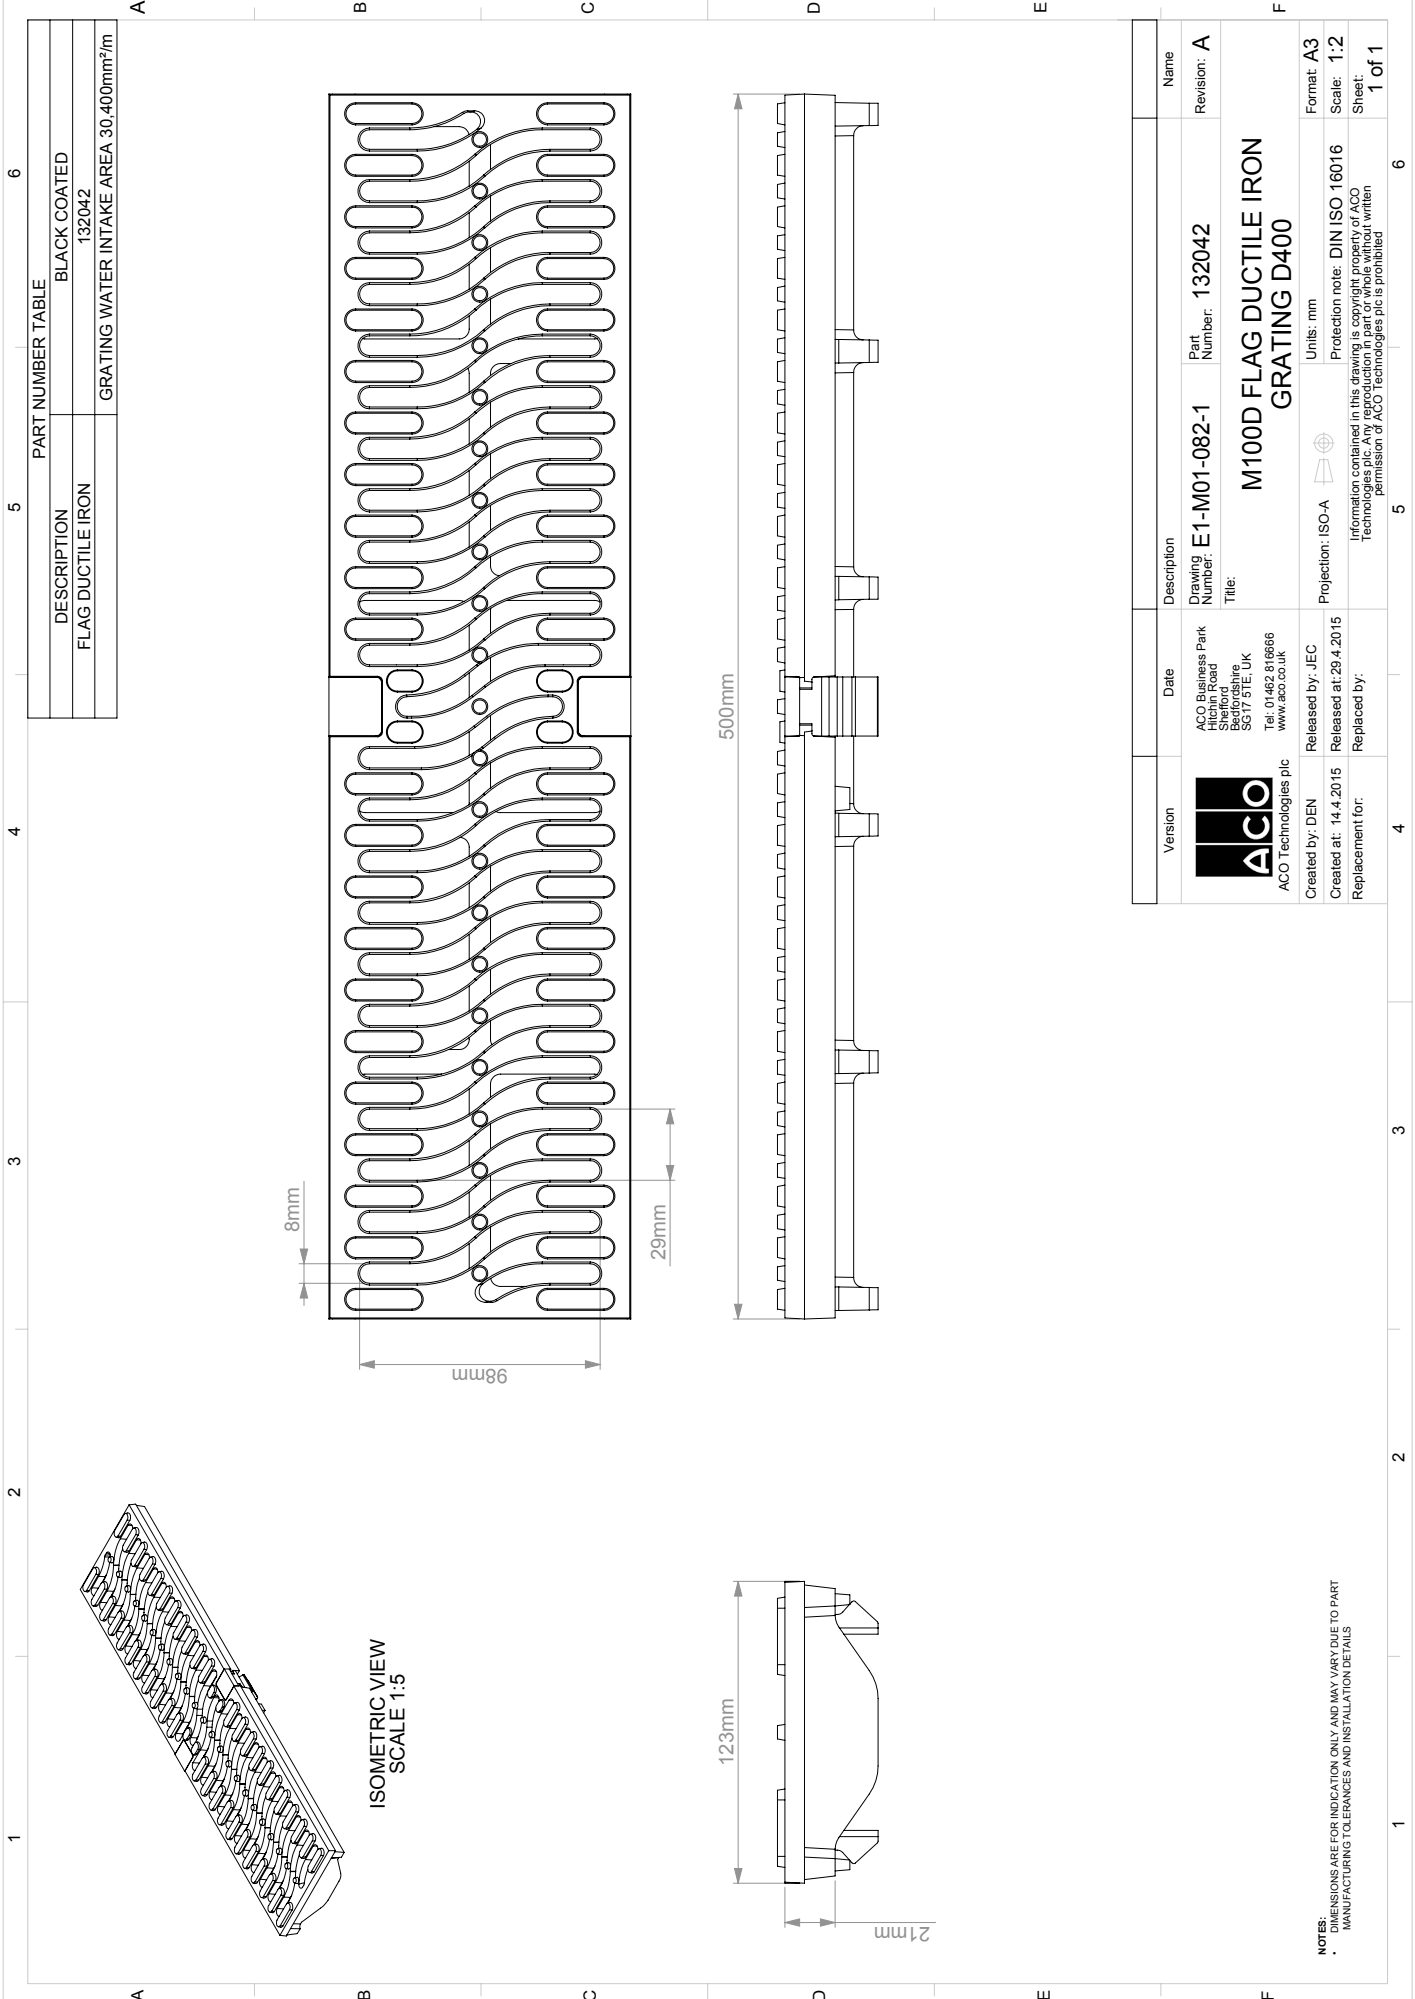

PART NUMBER TABLE	
DESCRIPTION	BLACK COATED
FLAG DUCTILE IRON	132042
GRATING WATER INTAKE AREA 30.400mm ² /m	



ACO Business Park
Hilton Road
Sheffield
Secton
S61 7 9T, UK
Tel: 01462 816666
www.aco.co.uk

Version	Date	Description	Name
		Drawing Number: E1-M01-082-1	Revision: A
		Title:	Part Number: 132042
M1000 FLAG DUCTILE IRON GRATING D400			
Created by: DEN	Released by: JEC	Projection: ISO-A	Units: mm
Created at: 14.4.2015	Released at: 29.4.2015	Information contained in this drawing is copyright property of ACO Technologies plc. Any reproduction in part or whole without written permission of ACO Technologies plc is prohibited.	Format: A3
Replacement for:	Replaced by:		Scale: 1:2
			Sheet: 1 of 1

NOTES:
DIMENSIONS ARE FOR INDICATION ONLY AND MAY VARY DUE TO PART MANUFACTURING TOLERANCES AND INSTALLATION DETAILS